



F99015 MV Agusta Inner Fuel Line Assembly Instructions

Fast By Ferracci Inc
1901 Davisville Rd
Willow Grove PA 19090
Tel (215) 657-1276
www.ferracci.com

Materials Included in kit:

1. 12"- F88501 Fuel Line
2. 4 - F99024 14.5mm Fuel Line Clamp

Tools Needed:

1. Hose Cutter
2. Measuring Tape
3. Crimping Tool (Ex. Fast by Ferracci F99029)

Section 1: Removing Body Work/Tank

1. Insert the ignition lock key in the saddle lock.
2. Press gently the tail end as shown in the figure.
3. Turn the key and release the lock.



4. Lift the tail.



5. Remove electrical connector from under driver's saddle.



6. Remove the rubber element. (1)
7. Remove the two nylon pins. (2)
8. Remove the tail.



9. Remove both r.h. and l.h. side frame covers, as shown in figure.
10. First pull out the rear part of the side frame, slowly move it backwards and then take out the front fixing from its seat.



11. Remove the fuel tank rear fixing screw. (1)



12. Lift the fuel tank and move it backwards as shown in the figure.




13. Tilt the fuel tank to the vehicle r.h. side. Disconnect the fuel lines (1), Electrical connector (2) and fuel tank breather (3).



14. Completely drain tank with the use of a pump as shown in figure



15. To aid in completely draining tank, remove fuel drain screw.

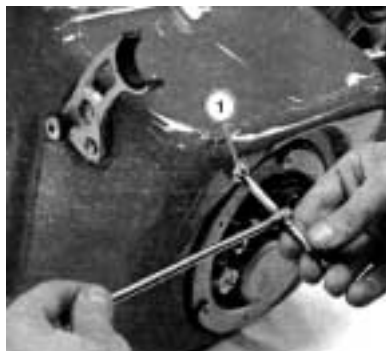

16. Completely empty the fuel tank, to facilitate this operation, we suggest that filler cap (1) be lifted.



17. Close filler cap. Turn tank upside down and remove the fuel tank flange by removing the three special fixing nuts (1)



18. Remove flange assembly from its seat. To remove the flange (1) use three M6 screw having the same length as shown in the figure (2). Insert the screws into the threaded holes. Tighten the screws in succession until the flange comes out of its seat



19. Lift flange (1) and disconnect the pipes (2) situated on both sides of the flange.



20. Remove the flange assembly.



21. Remove duct screw shown in the figure to allow the fuel still present in the ducts to flow out.



22. Cut the supplied hose into two sections, the first seven (7) inches and the second at two (2) inches long. Next remove the long hose (1) and replace with new one and use supplied clamps.



23. Now remove the smaller section of hose (1) and replace with newly cut piece.



24. Reinstall in reverse order.